Clean Freight Corridor Efficiency Assessment



Tab 20

CTC Commissioner Update

March 2023

Today's update will present: Clean Freight Corridors Assessment Update





Six proposed priority freight corridors



Three potential scenarios for zero-emission truck demand and resulting estimated infrastructure need





Potential priority freight corridors were identified by commodity flows, trip type, and likely vehicle used (by class and powertrain)

CALIFY COF CALIFY

2

AS OF 01/27/2023 DRAFT PRELIMINARY – FOR DISCUSSION

NOT EXHAUSTIVE

1 Commodities¹

Chemicals, rubber & plastic

Agriculture & food

products

By layering multiple inputs on top of Federal and state traffic data, freight flows could be segmented by the following factors:

materials Consumer goods Fossil Fuels Metals, metal products & hardware

Construction & wood


3 Vehicle class³

Medium-duty trucks: Class 4-6

Heavy-duty trucks: Class 7-8

- 1. FAF counts of trips by commodity
- 2. National trip type percentages applied to FAF corridor traffic
- 3. FAF counts of heavy and medium duty trucks (MDT and HDT)
- 4. National powertrain percentages applied to FAF corridor traffic counts

Source: Highway Performance Monitoring System (Federal Highway Administration), Freight Analysis Framework (Bureau of Transportation Statistics), powertrain and vehicle class production and technology insights (2022)

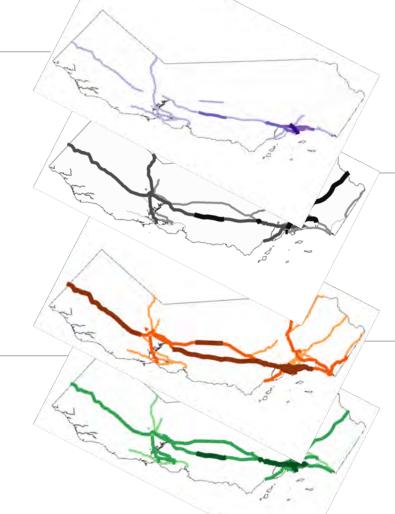

Trip type²

Urban

Regional

Long-haul

Projected **4** powertrain mix⁴

Combustion engine

Battery electric vehicle

Fuel cell electric vehicle

Proposed Top Six Freight Corridors

AS OF 02/02/2023 **ILLUSTRATIVE & DRAFT PRELIMINARY – FOR DISCUSSION**

Priority corridors for consideration

Ordered by truck VMT¹ – 2022 projected



Daily truck VMT on highvolume FAF links by corridor Million miles

0.7

0.7

6.4

16.5

>10M or >60% of statewide truck vehicle miles travelled

Further consideration of high truck vehicle volume but low truck VMT or <50-mile corridors may be necessary to complete charging and/or refueling infrastructure

10

80

99

* **** ***

1. Vehicle miles travelled

- 2. The I-5 corridor includes the I-710 where it connects I-5 to the ports of Los Angeles and Long Beach, and the segments of I-405 and Highway 1 that connects I-10 and I-710 near the San Pedro Bay Ports. This corridor also includes the local roads that connect the I-5 to the Port of San Diego and to the US/Mexico border
- 3. The I-10 corridor includes the short segment of SR-47 that connects I-10 to the Port of Los Angeles, and the segments of I-405 and Highway 1 that connects I-10 and I-710 near the San Pedro Bay Ports
- 4. The I-80 corridor includes the short segments of I-580 and I-880 that connect I-80 to the Port of Oakland

Source: Highway Performance Monitoring System (Federal Highway Administration), Freight Analysis Framework (Bureau of Transportation Statistics)

Top Six Corridors – Key Connecting Routes

STITE OF CALIFORNAY CALIFORNAY NOSSA

AS OF 02/09/2023 ILLUSTRATIVE & DRAFT PRELIMINARY – FOR DISCUSSION

PORT OF OAKLAND


The I-80 corridor includes the short segments of I-580 and I-880 that connect I-80 to the Port of Oakland

SAN PEDRO BAY PORTS

The I-5 corridor includes the I-710 where it connects I-5 to the Ports of Los Angeles and Long Beach, and the segments of I-405 and Highway 1 that connect I-10 and I-710 near the San Pedro Bay Ports. This corridor also includes the local roads that connect the I-5 to the Port of San Diego and to the US/Mexico border

The I-10 corridor includes the short segment of SR-47 that connects I-10 to the Port of Los Angeles, and the segments of I-405 and Highway 1 that connect I-10 and I-710 near the San Pedro Bay Ports

Note: These ports are key freight origin and destination points. Thus, they have been included in the freight corridors to reflect the need for infrastructure in and around them

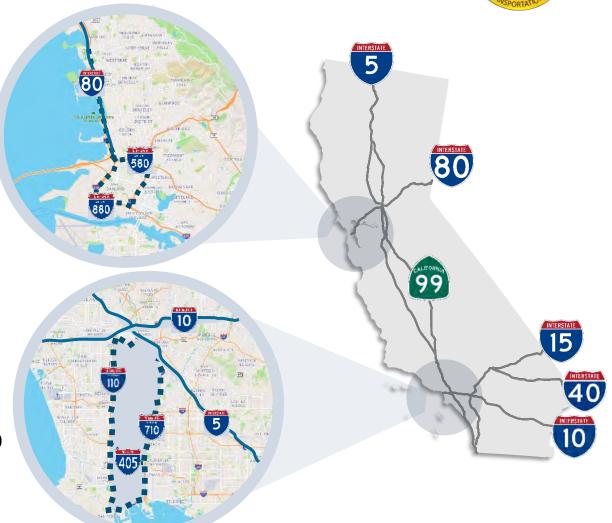

Zero emissions trucks could reduce annual tailpipe truck emissions along priority corridors by >50% by 2040²



AS OF 02/14/2023 DRAFT PRELIMINARY – FOR DISCUSSION

CA annual GHG emissions³

Both direct and indirect, business as usual projected 2040



Corridor tailpipe truck emissions with existing SB535 priority populations^{1,2}

0 • • • • • 1 mile
• SB 535 Disadvantaged communities by census tract
Illustrative near-road pollution decay radius⁴
Priority populations CES⁴ 2022 (CalEnviroScreen⁴)


- 1. The Map Priority populations CES4 (CalEnviroScreen 4) 2022 shows disadvantaged community and low-income community designations. Disadvantaged communities are designated by the California Environmental Protection Agencies (CalEPA), Disadvantaged community designations.
- per Senate Bill (SB) 535 (De León, Chapter 830, Statutes of 2012). CalEPA identified the list of disadvantaged community census tracts and land areas available at CalEPA Climate Investments to Benefit Disadvantaged Communities webpage
- Estimation of direct (tailpipe) emissions followed the following steps: (1) Forecast of VMT in 6 priority corridors (Source: Freight Analysis Framework / Federal Highway Administration, and Freight Booster, (2) Allocation of VMT 2024 and forecast by powertrain and truck type (Source: CARB ACF Population), and (3) Multiply average emissions per powertrain and truck type by VMT (Source: Emission Rates 2024 (Running Exhaust Emissions) Statewide from EMFAC2017 Web Database)
- 3. California GHG emissions by sector found at CARB GHG Inventory 2022 Edition (Link) Please note: estimates from CARB do not include medium duty category so assumptions on range were applied. On the graph "Medium and heavy-duty trucks" include all on-road non-passenger transportation
- 4. Based on literature review of CARB Land Use Handbook (Link); Environmental Protection Agency reports (Link); OEHHA; UC Davis report; Health Effects Institute reports (Link); which found that almost all pollutants decay to background by 115-1500M from edge of road 7



Three potential scenarios were created to gauge zeroemission truck demand and their estimated resulting infrastructure needs

Approach for estimating total energy required and infrastructure needs for priority corridors

AS OF 02/08/2023 DRAFT PRELIMINARY – FOR DISCUSSION

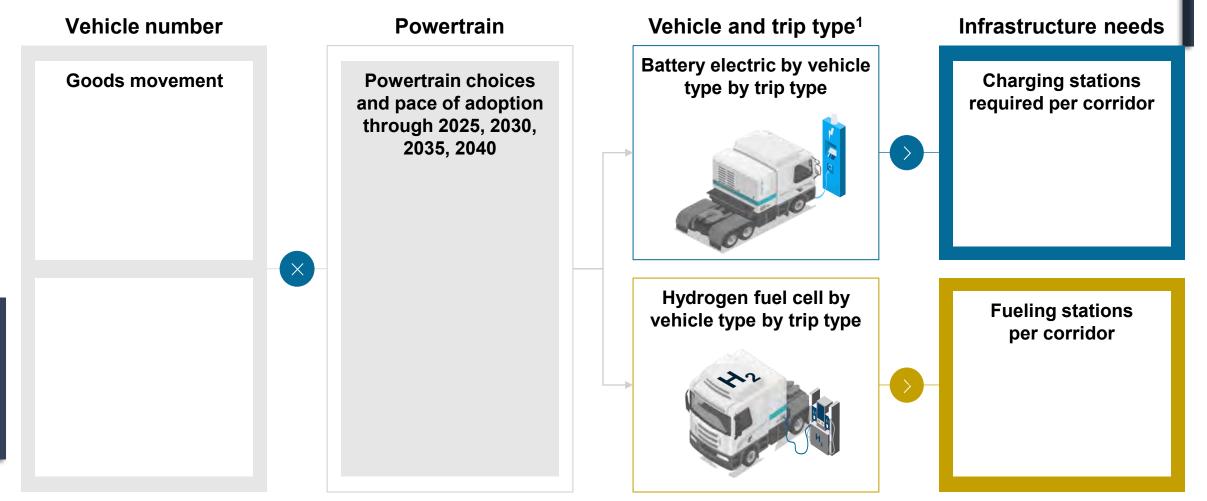


1. Vehicle types include Medium-duty trucks (Class 4-6), Heavy-duty trucks (Class 7-8); Trip types include: urban, regional, long-haul

Source: CTC Working Group; infrastructure needs assessment excel and geospatial modelling include data and insights from UC Davis, California Energy Commission, California Air Resources Board, Freight Analytics Framework (FAF5), Gualco, I.H.S. Automotive, ACT Research, American Trucking Association, Energy Information Administration, Alternative Fuels Data Center, Fleet manager surveys


Battery Electric (BEV) and Hydrogen Fuel Cell (FCEV) Trucks are Typically Best Suited for Different Use Cases

CALIFORNIA CALIFORNIA NOSSING RANSPORTATION COM

AS OF 02/08/2023 DRAFT PRELIMINARY – FOR DISCUSSION

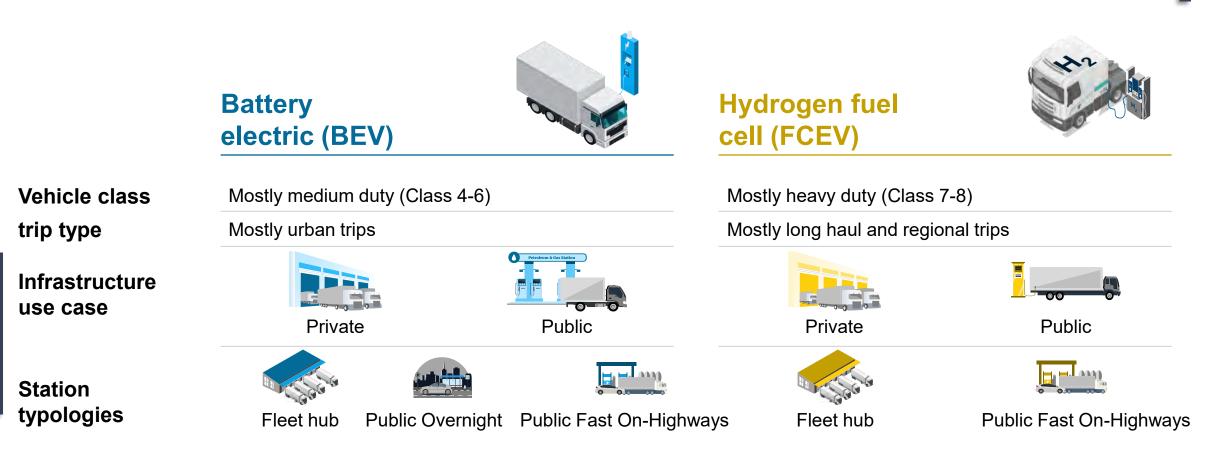

Scenarios are Based on 3 Possible Cost Outcomes & Technology Choices

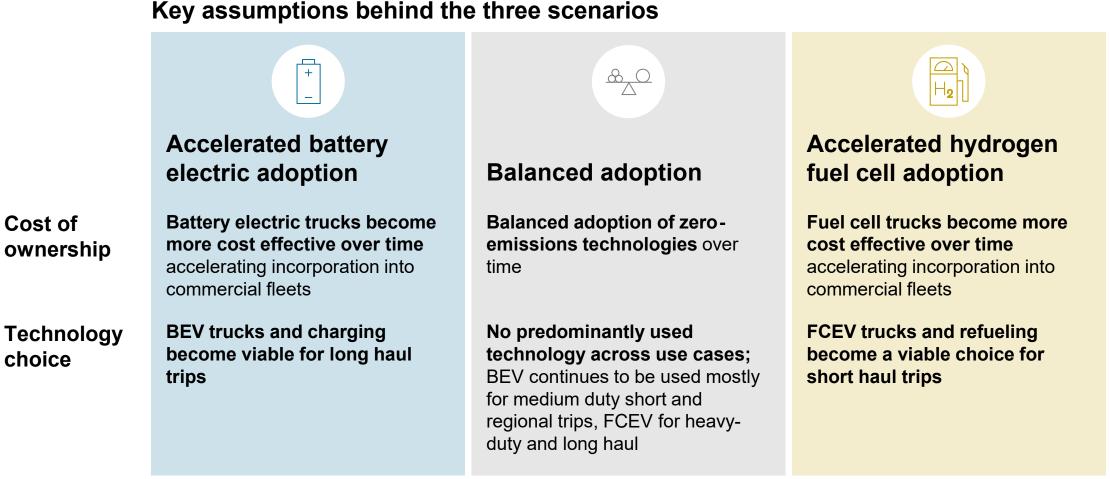

3 Scenarios of Zero-Emission Freight Infrastructure Needs

2025-2040 AS OF 02/16/2023 **DRAFT PRELIMINARY – FOR DISCUSSION** NON-EXHAUSTIVE BEV FCEV **Accelerated battery** Accelerated hydrogen fuel [+] Public Public _ **Balanced adoption²** cell adoption³ electric adoption¹ Private Private 2025 2040 2025 2040 2025 2040 16,136 5,493 7,070 6,736 5,737 5.417 2,339 686 583 1,773 5.052 10,643 4,303 254 Estimated number of 192 71 512 4,731 259 47 3,644 602 0 stations statewide 1,684 1,434 225 12 - 3565-194 8,470 2,883 3.711 3,536 3.011 2,844 1.228 Estimated number of 360 306 931 2.652 5,587 2.258 stations along 133 -37 269 2,483 101 25 136 1,913 316 0 6 priority corridors 753 884 $34 - 10^{\circ}$

1. CEC (California Energy Commission)

2. Balanced scenario includes I.H.S., ACT Research, American Trucking Association, Energy Information Administration, Alternative Fuels Data Center, Fleet manager surveys

3. Gualco

4. Other cross-cutting input assumptions include utilization, battery efficiencies, number of chargers per station, charging efficiencies, charging capacity factors, trip type, public vs. private etc.

Note: BEV – Battery electric vehicle; FCEV – Hydrogen fuel cell electric vehicle; powertrain adoption curves applied to California Air Resources Board (CARB) vehicles number projections

There's Benefit to Focusing on a Minimum Viable Network First



>3,000


1.228

2.258

Station

demand

(2040)

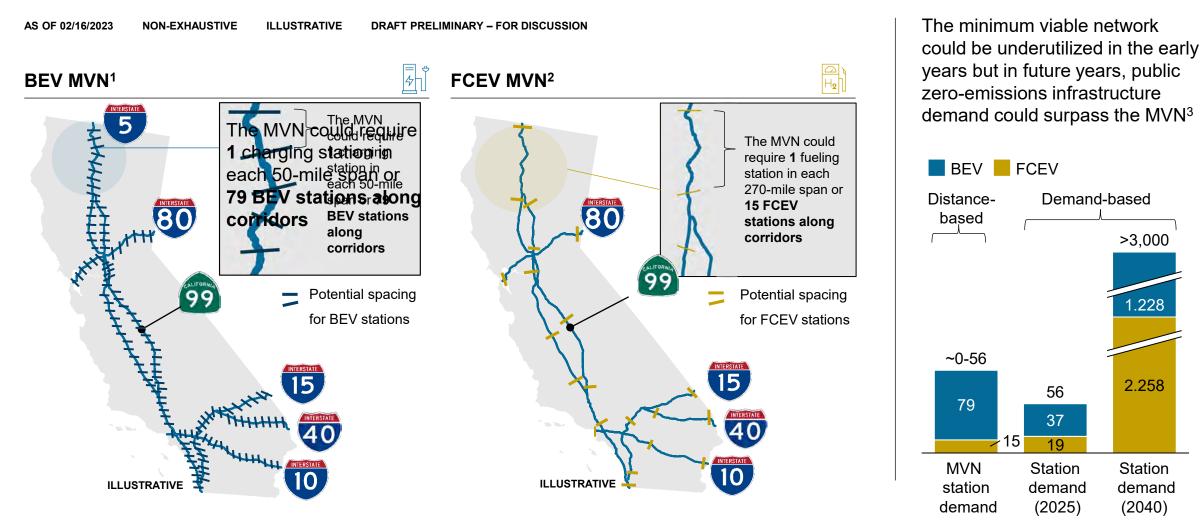

BEV maximum spacing was calculated to ensure that a poor-performing BEV truck would pass an average of 1.5 charging stations over the course of the truck's practical range (60% of it's theoretical maximum range) 1.

2. FCEV maximum spacing was calculated to ensure that an FCEV truck with a conservative range [estimated as 400 miles based on published ranges for multiple fuel cell trucks: Nikola One (500 mi), Quatron QHM (435 mi), Volvo (621

mi)] would pass an average of 1.5 charging stations over the course of the truck's conservative range


3. All numbers in this charts reference the Balanced scenario of the three potential powertrain adoption scenarios

CTC is considering key origin or destination points, existing infrastructure and submitted potential projects in this assessment

AS OF 02/17/2023

DRAFT PRELIMINARY - FOR DISCUSSION

Maps of Existing Infrastructure and SB 671 Working Group Submitted Projects

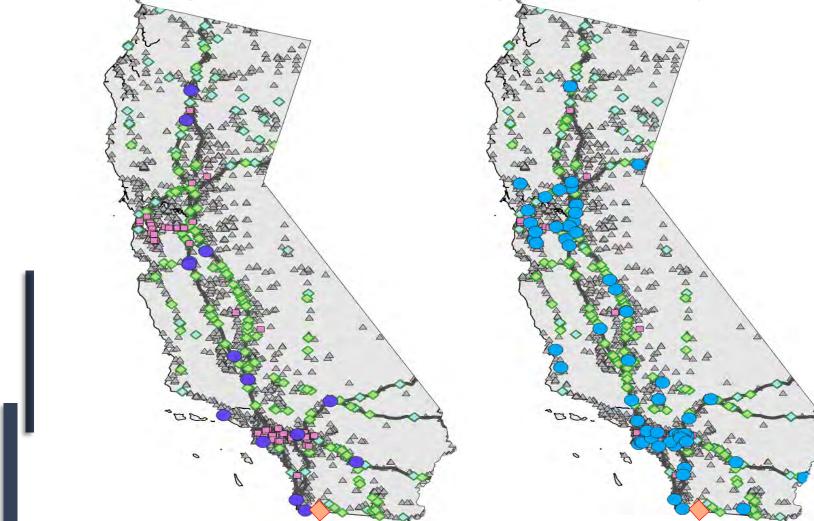

Submitted/existing BEV charging

Submitted/existing FCEV charging infrastructure

- Existing logistics warehouses
- Existing substations/utilities infrastructure
- Public truck parking
- Private truck parking
- Additional key origin or destination points

Source: 79 BEV and FCEV potential infrastructure locations submitted to SB 671 working group, existing logistics warehouses submitted to CTC working group from private sector. Truck parking locations from CalTrans Truck Parking study, existing substations from the Homeland Infrastructure Foundation Level Database

CARB	California Air Resources Board
BEV	Battery Electric Vehicle
CTC	California Transportation Commission
FAF	Freight Analysis Framework
FCEV	Fuel Cell Electric Vehicle
FHWA	Federal Highway Administration
GHG	Greenhouse Gas
GVW	Gross Vehicle Weight
HDT	Heavy-Duty Traffic
HPMS	Highway Performance Monitoring System
kWh	Kilowatt Hour
MDT	Medium-Duty Traffic
MVN	Minimum Viable Network
VMT	Vehicle Miles Travelled
GVW	Gross Vehicle Weight
1	

Glossary of Terms

Thank You



Hannah.Walter@catc.ca.gov

Kayla.Giese@catc.ca.gov